

LF03 Series Fluxgate Current Sensor

The LF03 series fluxgate current sensor incorporates dynamic fluxgate detection technology. Its design is simple and practical, with the ability to inhibit high temperature drift. Fluxgate technology makes use of the phenomenon of magnetic core saturation to modulate the measured magnetic field, transforming it into an electric field and thus, completing the magnetic field measurement process.



Features

- Fluxgate technology without hall element
- Output voltage proportional to carried current
- Max. rated measuring range $\pm 150\text{A}$ (DC or AC peak)
- Compact size for PCB mount
- Unipolar power supply
- RoHs compliance (Lead-Free)

Applications

- Solar inverters
- Servo motor drives
- Uninterruptible power supplies
- Battery management systems
- Welding applications

Advantages

- Accurately measures AC, DC and pulse currents
- Very low offset voltage
- Fast response $1\mu\text{s}$
- High frequency bandwidth
- Nearly zero offset voltage

Standards

- EN 50178: 1997
- IEC 60950-1:2006
- IEC 61010-1:2010
- IEC 62109-1: 2010

Absolute maximum ratings

Symbol	Parameter	Min.	Max.	Unit
$V_{DD\ max.}$	Maximum supply voltage (not destructive)		7	V
T_{PC}	Primary conductor temperature		105	°C
T_A	Ambient operating temperature	-40	85	°C
T_S	Storage temperature range	-40	110	°C
$V_{ESD-HBM}$	ESD sensitivity HBM(Human Body Model)		4	kV

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

Specifications ($T_A= 25^{\circ}C$, $V_{DD}= 5.0V$)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
V _{CC}	Supply voltage		4.75	5	5.25	V
I _c	Current consumption	I _p =0A without load	20+I _p / n _s +V _{OUT} / R _L			mA
I _{p1}	Current nominal measuring range	LF03-50	-150	±50	150	A
		LF03-100	-270	±100	270	
		LF03-150	-230	±150	230	
n _s	Number of secondary turns	LF03-50	1,258			
		LF03-100	1,258			
		LF03-150	1,588			
V _{REF1}	Internal reference voltage mode	I _p =0A	2.495	2.5	2.505	V
V _{REF2}	External referencet voltage mode		0		4	V
V _{OUT}	Output voltage		0.375		4.625	V
V ₀	Zero current output voltage	I _p =0A	V _{REF1} or V _{REF2} *1			V
V _{OE}	Offset voltage	V _{OE} =V _{OUT} (@I _p =0A)-V _{REF1} or REF2	-1		1	mV
T _{CVREF1}	Temperature coefficient of V _{REF1}		-50		50	ppm/°C
T _{CVO}	Temperature coefficient of V ₀	@I _p =0A T _a =-40°C ...85°C	-10		10	ppm/°C
T _{RA}	Step response to 10% of I _{p1}			1		μs
T _R	Step response to 90% of I _{p1}			1		μs
BW	Frequency bandwidth(-3dB)			100		kHz

*1 V_O can work internal reference voltage (V_{REF1}) or external reference voltage (V_{REF2}) mode.

Specifications ($T_A = 25^\circ\text{C}$, $V_{DD} = 5.0\text{V}$)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
I_{oe}	Offset current referred to primary without magnetic hysteresis	LF03-50	-80		80	mA
		LF03-100	-160		160	
		LF03-150	-240		240	
G	Nominal sensitivity (625mV / I_{pn})	LF03-50		12.5		mV/A
		LF03-100		6.25		
		LF03-150		4.17		
ϵ_G	Sensitivity error	$\pm I_{pn}$ @ $T_A = -40^\circ\text{C} \dots 85^\circ\text{C}$	-0.7		0.7	%/ I_{pn}
T_{cg}	Temperature coefficient of G	$T_A = -40^\circ\text{C} \dots 85^\circ\text{C}$	-40		40	ppm/ $^\circ\text{C}$
ϵ_L	Non-linearity error	$\pm I_{pn}$ without offset	-0.1		0.1	%/ I_{pn}




Insulation characteristics

Symbol	Parameter	Value	Unit	Comment
V_o	Insulation voltage for isolation, 50Hz, 1 min	4300	V	
R_{iso}	Isolation resistance @ DC 500V	>500	M Ω	
D-CLE	Clearance	12.9	mm	Shortest distance through air
D-CRD	Creepage distance	12.9	mm	Shortest path along body




General characteristics

Symbol	Parameter	Value	Unit	Comment
m-HSE	Housing material	V0		Flame retardant UL 94
m	Mass	35	grams	


Current measurement range versus external reference voltage

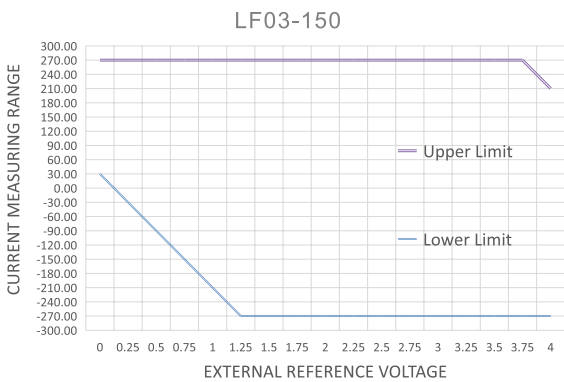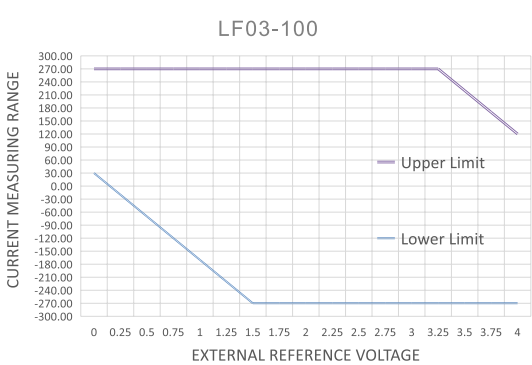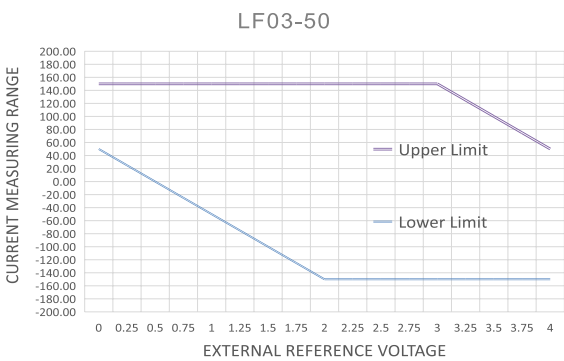


Max. DC primary current versus ambient temperature

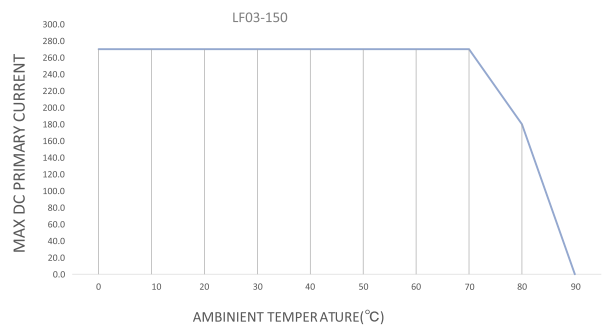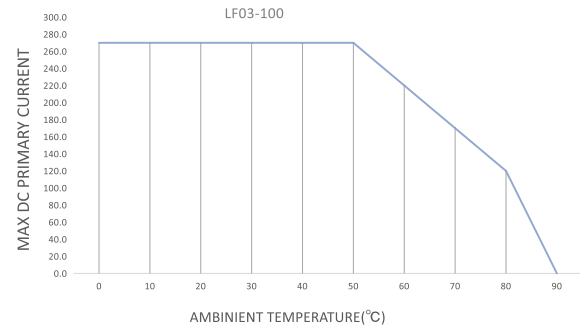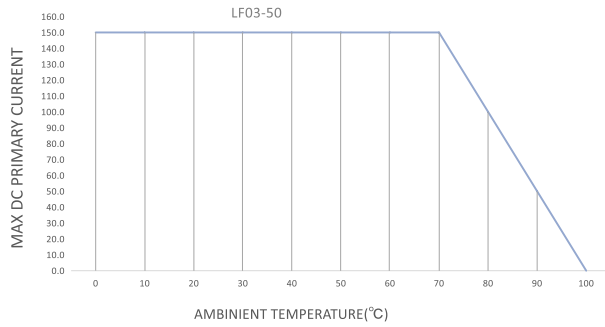

PCB footprint (mm, general tolerance $\pm 0.05\text{mm}$)

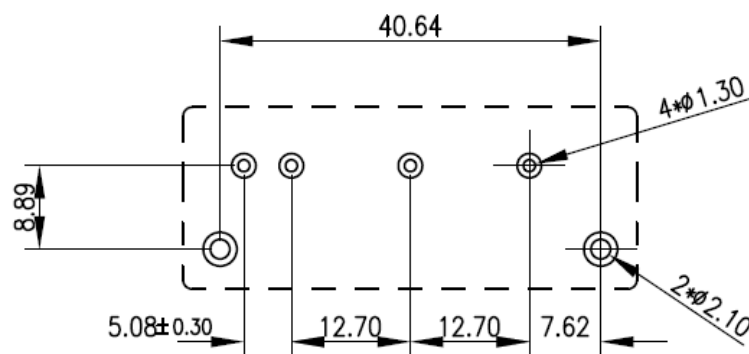


Dimension (mm) - Through-Hole mount

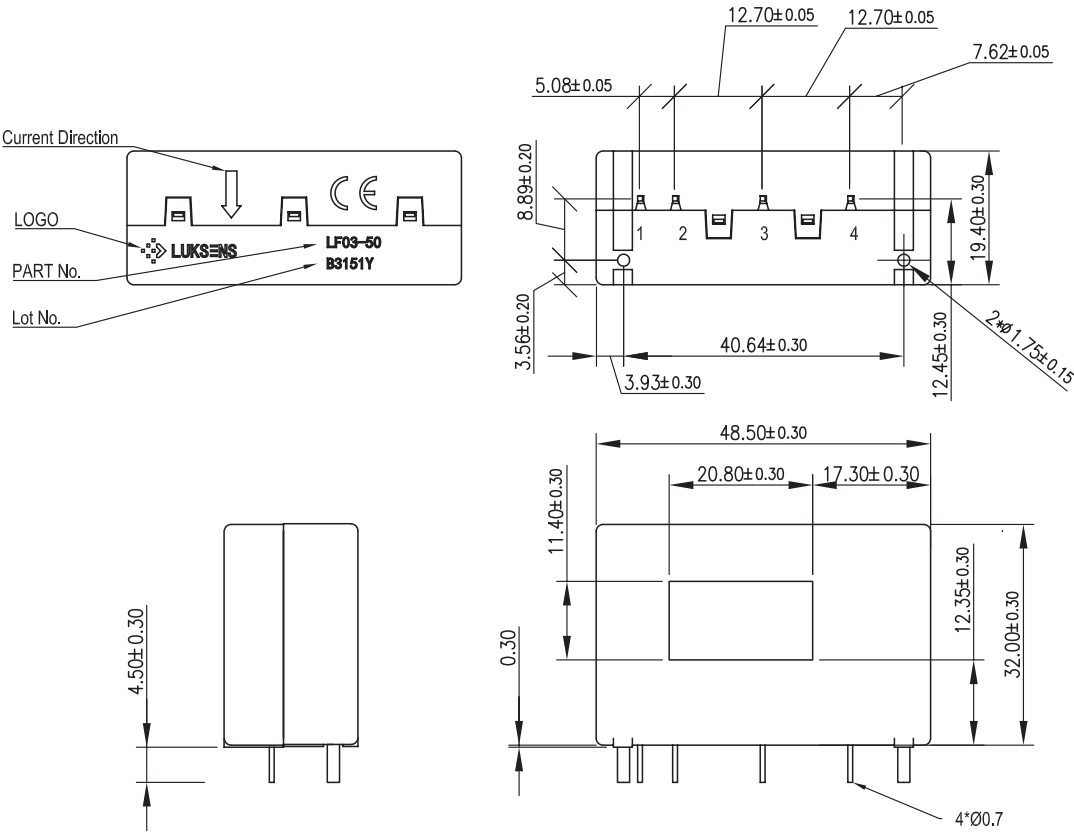

Pin	Symbol
1	V_{REF}^{*1}
2	V_{OUT}
3	GND
4	V_{CC}

*1 V_{REF} can be used in internal reference or external reference voltage mode


Dimension (mm) - Bus-Bar mount

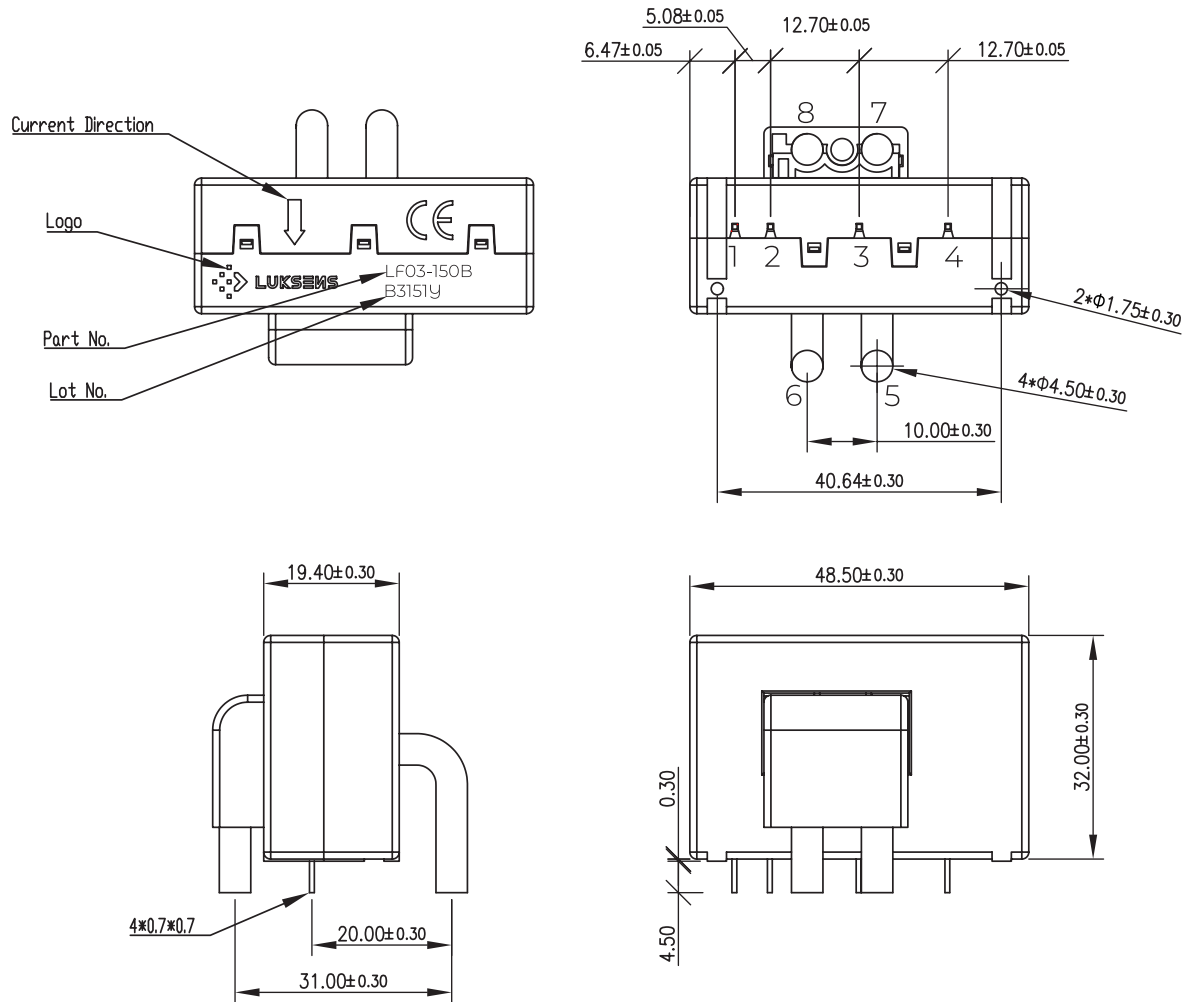

Pin	Symbol
1	V_{REF}^{*1}
2	V_{OUT}
3	GND
4	V_{CC}
5, 6	I_p^+
7, 8	I_p^-

*1 V_{REF} can be used in internal reference or external reference voltage mode

Name Guide Description

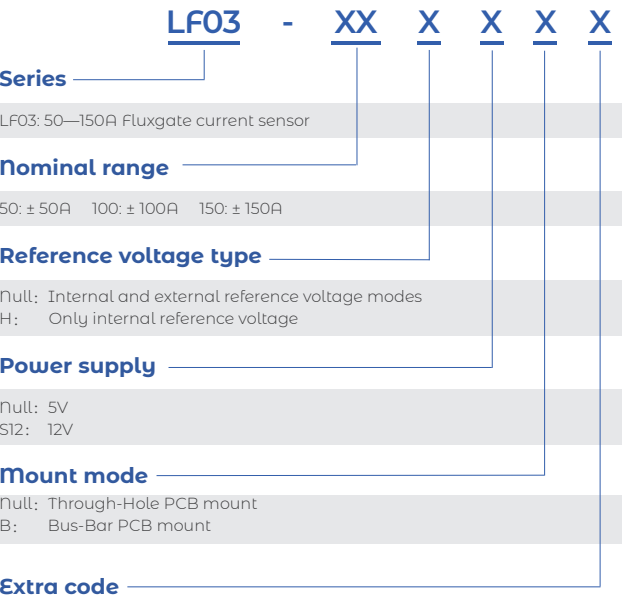

Notes

The content of this document is subject to revision without notice. Luksens shall have no liability for any error or damage of any kind resulting from the use of this document.

Safety and Environment



The product is to be installed by manufacturer trained personnel or competent person trained in accordance with manufacturer installation instructions.

With respect to applicable standards IEC 61010-1/ EN 61010-1 *safety requirements for electrical equipment for measurement, control and laboratory use part 1 general requirements*, the product should be used in limited energy secondary circuits.



Risk of electrical shock

Certain parts of the module can carry hazardous voltage during the operation process of the product because hazardous live voltage of primary conductor, power supply occurs, injury and/or serious damage will be caused if this warning is ignored.

Conducting parts must be inaccessible after installation of the product. Additional protection including shield or protective housing could be used according to IEC 60664 Insulation coordination for equipment within low-voltage supply systems.

Disconnection of the main supply will protect against possible injury and serious damage.



ESD protection

Damage from an ESD event will occur if the personnel is not well grounded when handling.

Important notice

Luksens reserves the right to change the specifications, including all statements and data appearing in Luksens' catalogues, data sheets and advertisements, without notice. Luksens will publish the modified specifications on its website. If such changes to specifications are made, Luksens shall have no obligation to provide the change on Products previously purchased. The information included herein is believed to be accurate and reliable. However, since additional design, measure, production, quality control take effect in the end product, therefore Luksens shall have no liability for any potential hazards, damages, injuries or loss of life resulting from the end product. Luksens products are not to be used in any equipment or system, including but not limited to life support equipment or systems, where failure of Luksens products may cause bodily harm.